

# Case Study

## SLOPE STABILIZATION: APARTMENT COMPLEX EROSION THREAT



The owner of an apartment complex overlooking Stephen Foster Creek in Gainesville, Florida, faced a critical issue. The embankment below showed signs of erosion, creeping dangerously close to the structures. With each passing day, the unstable ground crept ever closer to the foundations of the residential structures, posing a significant threat to both the buildings and the safety of their inhabitants. The situation demanded immediate attention and a robust, long-term solution to safeguard the property and ensure the well-being of its residents. The predominantly sandy composition of the local soil posed a challenge for stabilization. Consequently, the owner called us at Stable Soils to address this pressing concern.

### PRODUCT AND ADVANTAGES:

After conducting a thorough site assessment and carefully evaluating various potential solutions, the team at Stable Soils identified AP Soil 600 as the optimal polymer for this challenging project. This choice was strategic. AP Soil 600 features low viscosity, a crucial characteristic that allows it to effectively penetrate and permeate sandy soil. Moreover, its impressive strength after curing promised long-lasting stability for the embankment.

### PHYSICAL PROPERTIES - CURED

AP SOIL 600			
Tensile Strength	(ASTM D-3574)	175 p.s.i.	12,066 millibar
Shrinkage	(ASTM D-1042/D-756)	Negligible	Negligible
Compressive Strength (with fine sand)	(ASTM D-575/D695)	2,085 p.s.i.	143,756 millibar
Pre-activated mix viscosity	37 - 39 Centipose		


Properties will vary depending on application conditions.

### PROCEDURES:

Injection points were established in a zigzag pattern, spaced 18 inches apart. The team drilled 10 feet below grade to reach the optimal depth for soil reinforcement. Low-pressure injection was key to the operation's success. This approach prevented the chemical from fracturing the soil or moving in unintended directions. The injection rod was slowly extracted, allowing for precise distribution of the polymer. One gallon was applied every five minutes and every vertical foot. In total, a 240-foot row of soil stabilization resin was installed.

### RESULTS:

The impact of this intervention was immediately apparent. During a subsequent heavy rain event, surrounding areas suffered minor washouts while the stabilized soil remained completely unaffected. The stark contrast in performance served as a powerful testament to the effectiveness of the AP Soil 600 polymer and the precision of its application. The apartment buildings, once precariously positioned near the eroding embankment, now stand secure and protected, their foundations no longer at risk from the relentless forces of erosion.

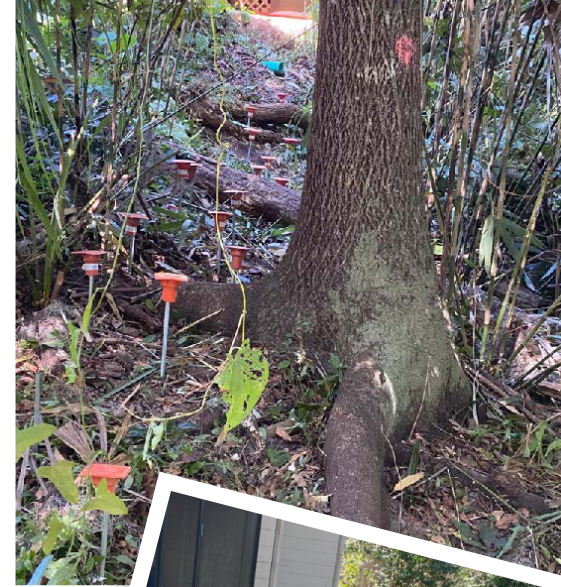

After a heavy rain, surrounding areas suffered minor washouts while the stabilized soil remained completely unaffected.

### Headquarters

Stable Soils of Florida, Inc.  
4265 Northwest 44th Ave., STE 7  
Ocala, Florida 34482

PHONE: 352.433.2323

TOLL FREE: 866.622.3723

LEARN MORE AT:

[www.StableSoils.com](http://www.StableSoils.com)



There are people out there that claim they can perform, but when you want the BEST, give us a call! NASA, Sikorsky Helicopter, U.S. Department of Energy (to name a few of many) know who to call when repairs are critical! Visit us on the web at [StableSoils.com](http://StableSoils.com)!

**Quick, easy, non-disruptive and ready to use in a couple of hours... not days!**